PRONOMIC

EasyRoll Tilt - Reel turner

Turn your reels over effortlessly



EasyRoll Tilt - Reel turner



Do you handle heavy reels every day?

Handling heavy reels can create risks for operators, slow down production changeovers, and increase operating costs. A suitable handling solution helps make these operations safer while improving productivity.

The solution: the EasyRoll Tilt reel turner

This gripper is designed to lift, move, and tilt reels of up to 120 kg with ease.

Its 100% mechanical operation, with no electrical power supply, makes it a reliable, robust solution that is ready to use immediately.

It can be easily installed on your existing lifting equipment or supplied together with one of our systems.


Benefits for your company

- Improve operator safety and reduce MSDs
- Increase productivity
- Reduce costs
- A solution that adapts to your business and your working environment

Discover the EasyRoll Tilt in action on our YouTube channel!


A configurable solution to meet your needs

Because every workshop has its own space constraints, the EasyRoll Tilt reel turner is available in two frame configurations.

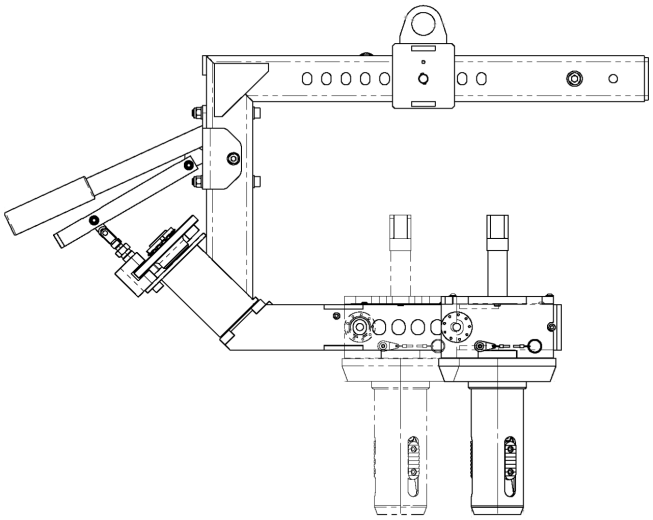


COMPACT | 250-500 mm

Smaller footprint, greater maneuverability in confined spaces.

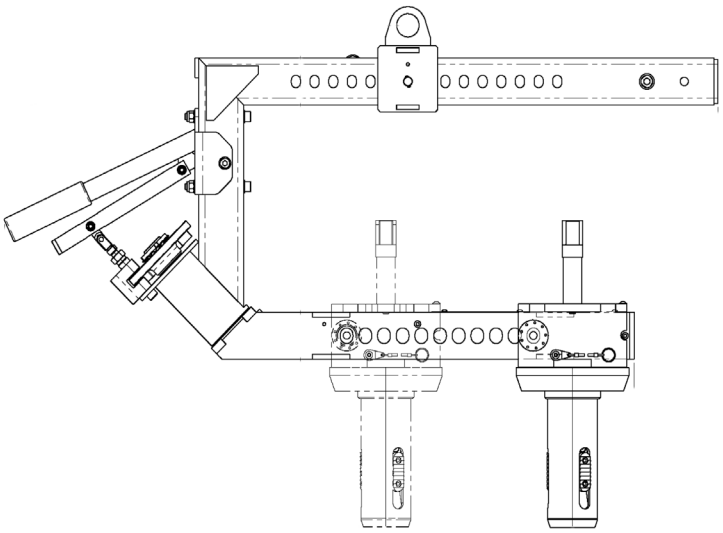


STANDARD | 250–750 mm

Greater handling range for wider reels.

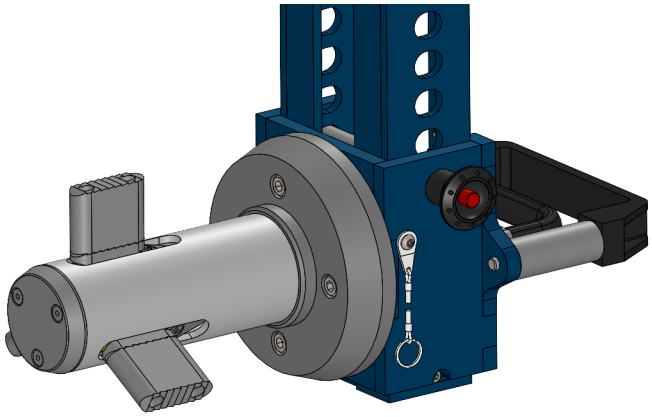

Set of add-on jaws for large core diameters

Do you handle reels with larger core diameters? A set of add-on jaws can be fitted to the mandrel to extend the gripping range and ensure a reliable, secure hold, without replacing your equipment.

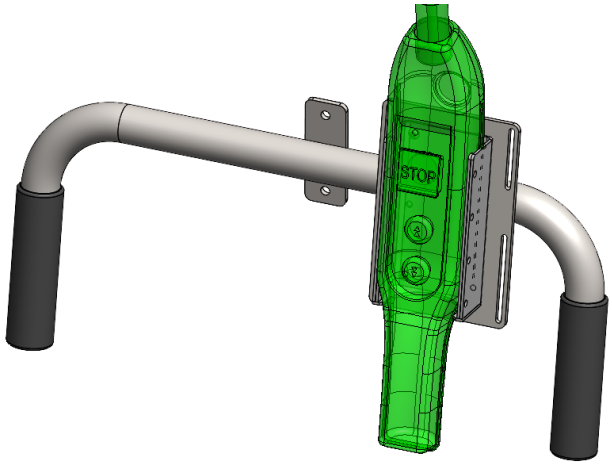


Handlebar option with integrated control


To further improve ease of use, the reel turner can be equipped with an ergonomic handlebar that allows the hoist push-button control box to be installed directly on the gripper. The operator can therefore control lifting and handling from the gripper itself, providing better movement control, time savings, and improved ergonomics.

Technical specifications

SPECIFICATION	VALUE
STANDARD MAXIMUM CAPACITY	120 KG
SPECIFIC MAXIMUM CAPACITY	250 KG
ROTATION	90°
MAXIMUM OUTER REEL DIAMETER	850 MM
COMPACT FRAME WEB WIDTH	250 À 500 MM
STANDARD FRAME WEB WIDTH	250 À 750 MM
CORE INNER DIAMETER	70 À 76 MM - 152 MM WITH ADD-ON JAWS (intermediate diameter possible on request)
POWER SUPPLY	NONE - 100% mechanical operation

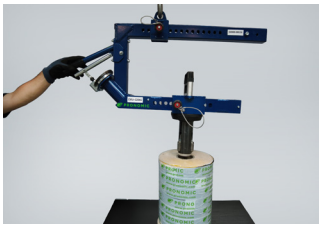

1. Position

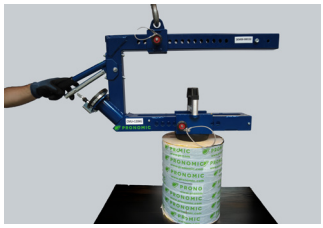


2. Insert




3. Lift



4. Tilt



5. Place



6. Remove

Optimize the handling of your reels

Every application is unique. Talk to our experts to find the configuration suited to your reels and schedule an EasyRoll Tilt trial.

This product sheet presents our reference configuration. Need a different capacity, an adaptation to your reels, or a specific integration? Our teams will support you in defining a tailor-made solution.

Discover the EasyRoll Tilt in action on our YouTube channel!

PRONOMIC SAS
70, rue des Grands Chênes
Zones des Granges
42600 MONTBRISON
Tél : +33 (0)4 77 60 04 16
info.fr@pronomic.com www.
Pronomic.com/fr

PRONOMIC

CE

2023 Pronomic AB. All rights reserved. All information provided is considered accurate at the time of printing. Pronomic reserves the right to modify product specifications without prior notice.