


# Lift&Drive 175PRX

Technical data sheet



Dimensions

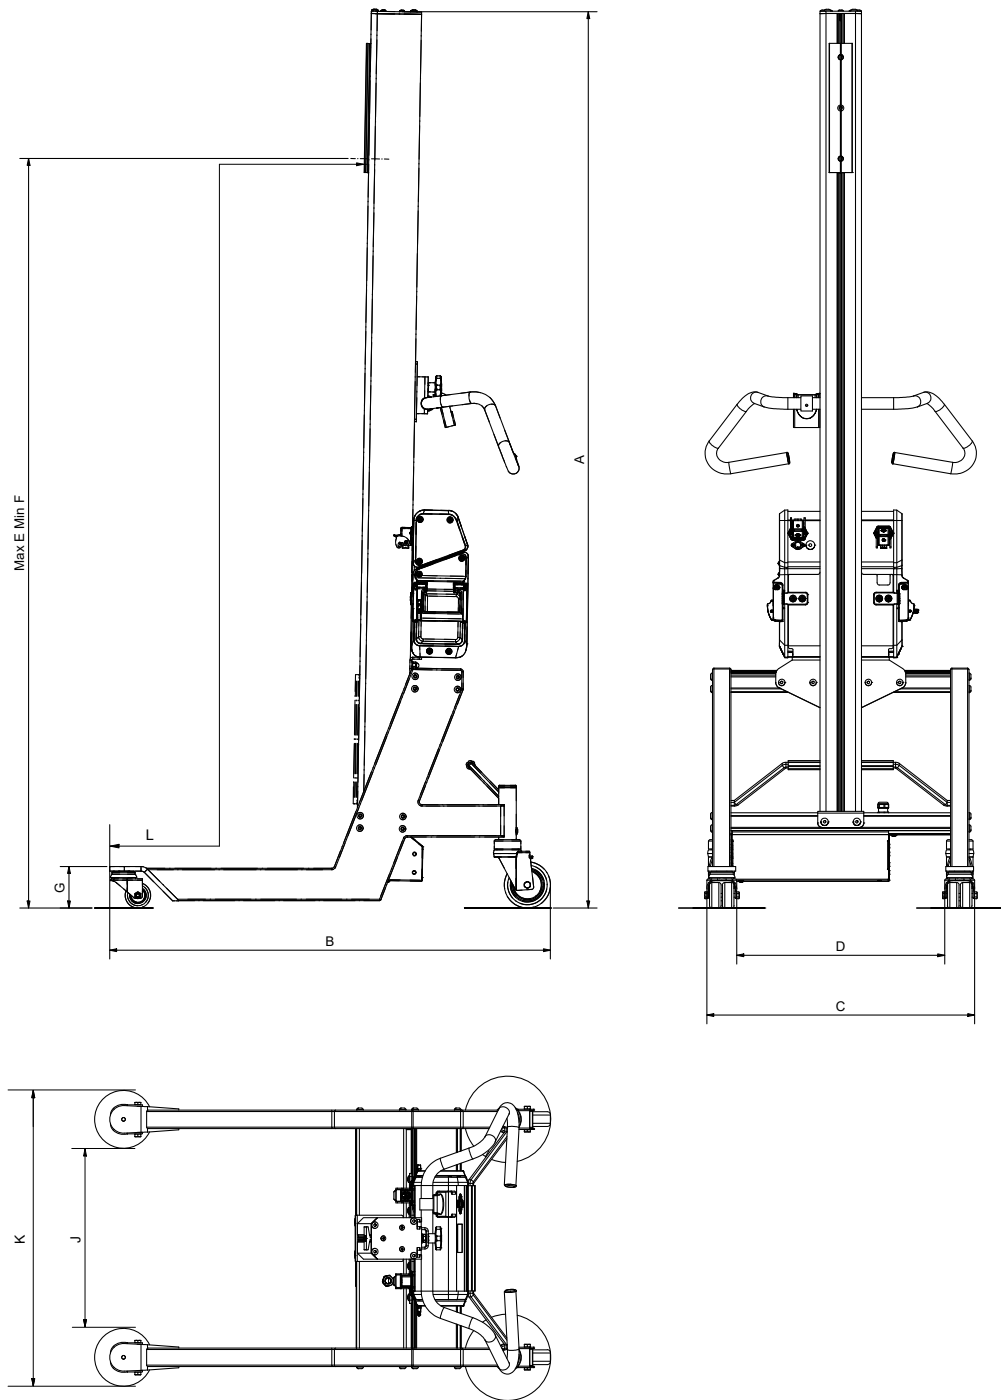

| Model *                  | A    | B   | C   | D   | E    | F   | G   | J   | K   | L   |
|--------------------------|------|-----|-----|-----|------|-----|-----|-----|-----|-----|
| 175PRX (mm)              | 2000 | 990 | 578 | 454 | 1676 | 311 | 142 | 339 | 693 | 529 |
| 175PRX, low castors (mm) | 1948 | 956 | 590 | 440 | 1624 | 259 | 90  | 391 | 641 | 528 |

\* Base model as standard column, legs, and cross member. The table shows theoretical measurements.

Technical data

|                                                        |                   |
|--------------------------------------------------------|-------------------|
| Description                                            | Lift&Drive 175PRX |
| Net weight (kg)*                                       | 61                |
| Maximum load including tool at 400 mm from column (kg) | 175               |
| Max lifting speed empty (mm/s)                         | 78                |
| Weight load ratio                                      | 0,35              |
| Stainless steel option                                 | Yes               |
| Min turning radius* (Ø mm)                             | 1128              |
| Safety approvals                                       | CE                |

Battery options


|                               |                               |
|-------------------------------|-------------------------------|
| Battery types                 | LiFePO4 or VRLA AGM           |
| Nominal battery voltage (VDC) | 24                            |
| Battery capacities (Ah)       | 10 LiFePO4<br>12 AGM, 17 AGM, |

Charger

|                              |                                                                                                  |
|------------------------------|--------------------------------------------------------------------------------------------------|
| Charger options (A)          | 1.5 or 4                                                                                         |
| Max charge voltage (VDC)     | 29                                                                                               |
| Nominal input voltage (VAC)  | 100-240 ±10%                                                                                     |
| Available plugs with charger | Plug Type A – North America<br>Plug Type C – Europe<br>Plug Type G – UK<br>Plug Type I – AU / NZ |
| Safety - Charger 1.5A        | CE, cCSAus, IEC EN 60601-1, IEC EN 60601-1-2                                                     |
| Safety - Charger 4A          | CE, UL, CSA                                                                                      |

\* Lowest net weight, no tool, Li battery  
\*\* Performance under optimal circumstances

Load capacity

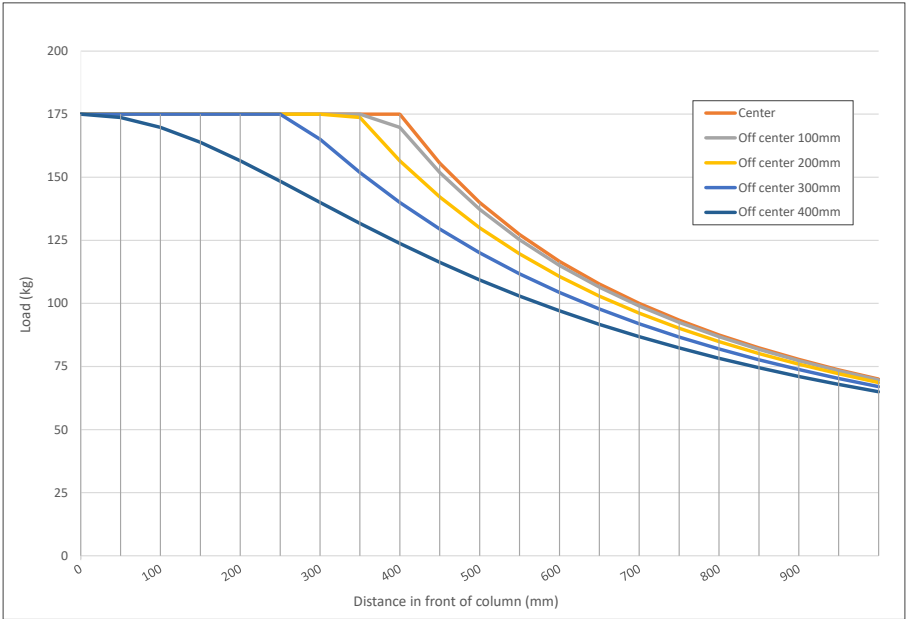

Available tools and accessories

| Tools                 | Accessories                |
|-----------------------|----------------------------|
| Prong                 | Holder for battery charger |
| Expand&Turn           |                            |
| Squeeze&Turn          |                            |
| Turn                  |                            |
| Option: Bespoke tools |                            |

